

## DECLARATION OF PERFORMANCES

N°IB035|CPR2006-09-25| English version - Rev 01

1. Unique identification code of the product-type :

**1.8901**

2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):

**Plates S460N according to EN 10025-3**

3. Intended use or use of the construction product in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

**To be used cut to length plates in metal structures or in composite metal and concrete structures**

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as requires pursuant to Article 11 (5)

**Industeel Belgium S.A  
266,Rue de Chatelet  
6030 Marchienne-au-pont  
Belgium  
Tel :+32 71 44 18 28**

**Email : carine.desondre@arcelormittal.com**

5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):

**Not applicable**

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:

**System 2+**

7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:

**EN 10025-3:2004**

Notified factory production control certification body No(.See list below) performed the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of conformity of the factory production control

<b>Charleroi</b>
------------------

<b>1148</b>
-------------

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

**Not applicable**

**DECLARATION OF PERFORMANCES**  
 N°IB035|CPR2006-09-25| English version - Rev 01

9. Declared performance

Essential characteristic	Performance				Harmonised technical specification
Tolerances on dimensions and shape	Thickness, length and width		EN 10029		EN 10025-3:2004
	Flatness on cut to length plate		EN 10029		
Yield Strength	Nominal thickness (mm)		Values (Mpa)		
	>	≤	ReH		
		16	460		
	16	40	440		
	40	63	430		
	63	80	410		
	80	100	400		
	100	150	380		
	150	200	370		
200	250	-			
Tensile Strength	Nominal thickness (mm)		Values (Mpa)		
	>	≤	Rm min	Rm max	
		100	540	720	
	100	200	530	710	
	200	250	-	-	
Elongation	Nominal thickness (mm)		Values		
	>	≤	min (%)	Samples	
		16	17	5,65√So	
	16	40	17	5,65√So	
	40	63	17	5,65√So	
	63	80	17	5,65√So	
	80	200	17	5,65√So	
	200	250	-	5,65√So	
Impact Test	Nominal thickness (mm)		Values trans.		
	>	≤	KV mini (J)	T°	
	5,99	8,49	14	0°C	
	8,49	10,99	21	0°C	
	10,99	200	27	0°C	
CEV	Nominal thickness (mm)		Values		
	>	≤	%		
		63	0,53		
	63	100	0,54		
100	200	0,55			
Durability	Nominal thickness (mm)		Values		
	>	≤	%		
		200	C ≤ 0,20 Si ≤ 0,60 1,00 ≤ Mn ≤ 1,70 P ≤ 0,030 S ≤ 0,025 Al ≥ 0,020 N ≤ 0,025 V + Nb + Ti ≤ 0,22	Cr ≤ 0,30 Cu ≤ 0,55 Ni ≤ 0,80 Mo ≤ 0,10 Nb ≤ 0,05 V ≤ 0,20 Ti ≤ 0,05 Mo + Cr ≤ 0,30	


\*\* subject to agreement between manufacturer and his customer

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9

This declaration of performance is issued under the responsibility of the manufacturer identified in point 4

Signed for and on behalf of the manufacturer by:

Matthieu Sinnaeve  
 Head of Method Department- Metallurgy  
 Charleroi, 31<sup>st</sup> may 2016

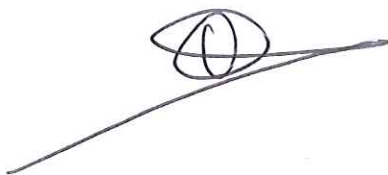

Karim Bahri  
 Head of Quality Management System  
 Charleroi, 31<sup>st</sup> may 2016

