

Industeel



User guide for
Mars® protection steels

User guide for Mars® protection steels



Industeel



User guide for
Mars[®] protection steels

The information presented in this guide were the most up-dated at time of printing. Variations are always possible depending on advancement in our Research programs on protection steels.

We advise you to get in touch with us to verify them before placing order. In addition, the field conditions for each application are specific. The information presented here are only indicative and cannot be considered as a guarantee unless there is explicit confirmation in the form of a warranty contract written by our specialised departments.

Publisher: Industeel ArcelorMittal - 56 rue Clémenceau - 71200 LE CREUSOT

Writers: Yves ROYAL, Antoine PROUST, Jean-Pierre LAURENT, Frédéric BOUCHAUD, Anne HIGELIN

Layout: Clarisse TOURNEAU

Printing: NECC - 26 place de Beaune - 71100 Chalon s/ Saone

English Edition 2017

© Industeel ArcelorMittal

Safety	12
A. Background	
Mars® 190	12
Mars® 220	12
Mars® 240	13
Mars® 300	13
Mars® 300 perforated	14
Mars® 600	14
B. Specifications	15
C. Chemical composition	16
D. Mechanical properties	18

Mechanical operations

Recommendations	20
A. Drilling	22
B. Milling	23
C. Sawing	23
D. Water jet cutting	24

A. Laser procedure	
Laser cutting	27
Laser beveling	28
Laser drilling	29
B. Oxygen cutting	30
C. Plasma torch cutting	31

A. Cold forming - Bending

Advice and precautions for cold forming	33
Bending strength	35
Springback after bending	36

B. Hot forming 37

A. General and basic precautions of welding	
Assembly properties	38
Docking, assembly	38
Temperature of plate metal	39
Tack welding	39
Creating welds	40
Welding sequences	41
Assembly fatigue	42
Handling of plates and parts before welding	43
Finishing	43
B. Consumables	
General information on consumables	44
Coated electrode welding	45
Semi-automatic gas-shielded welding	46
C. Assembly with high density energy process	
Electron-beam welding	48
Laser welding	49

Safety

Mars® protection steels must be used with caution. The stored elastic energy during forming may lead to rupture or shifting. It is essential to maintain a safe distance and not situate oneself in front of the plate while it is being formed. As a general rule, when using Mars® protection steel, the increased mechanical characteristics of this material must be taken into account. It is crucial to wear appropriate individual safety equipment and to equip machines with collective protection.

General points

Mars® steels are high hardness (up to 655 HB in the case of Mars® 300) protection steels offering the optimal combination of ballistic resistance and fabricability properties for their various uses.

If a specific technique - furthermore, one used on more classical construction steels - must be used, probative tests must be carried out and validated prior to manufacture.

Mars® 190 (NF A36-800-1 CLA / MIL-DTL-12560 Class 1, 2 & 3) steel is designed for all vehicle structures (main battle tanks, armoured personal carriers ...), stationary protection (buildings, sentry boxes, observation posts, etc.) and for ammunition testing targets.

Mars® 190 steel is highly versatile, combining ease of use even in important thicknesses, with good ballistic properties against all ammunitions.

Mars® 220 (NF A36-800-1 THD 1 / MIL-DTL-12560 Class 4a) is a protection steel dedicated to vehicle structures for protection against mines and IED. It offers optimal mechanical characteristics in terms of hardness (440 HB), toughness, and ductility for resistance against blast and fragments, while keeping an excellent workability, especially bending and welding, for building specific vehicle profiles used blast protection (example: V-shaped floor).

Mars® 240 (NF A36-800-1 THD 2 / MIL-DTL-46100) is a high hardness (500 HB) protection steel offering the optimal combination of ballistic resistance and workability for the following applications:

- Very light to medium-weight vehicles structures
- Add-on armour of any thickness for usage up to heavy tanks.
- Boxes, containers, shelters, reservoirs, door frames, etc.

Mars® 300 (NF A36-800-1 THD 4 and THD 5 / MIL-DTL-32332 Class 1 & Class 2) is a ultra high hardness (630 HB) protection steel offering very high ballistic resistance performance compared to structural armourgrades. It's the best steel solution for weight saving.

Mars® 300 can be used for a wide range of applications:

- Individual protection, light armour for helicopter protection
- Detachable for vehicles, add-on armour
- Heavy protection components for main battle tanks protection against kinetic projectiles and shaped charges

Mars® 300 perforated steel (NF A36-800-1 THD 4 and THD 5 / MIL-DTL-32332 Class 2) is a ultra high hardness (630 HB) protection steel used as add-on armour.

For the same level of protection, Mars® 300 perforated is a light weight solution, equivalent to composite, materials like ceramic, with a much better multi-hit capability and easier integration.

Mars® 600 (NF A36-800-1 THD 4 / MIL-DTL-32332 Class 1) is an ultra high hard armour steel (600 HB) having both very high ballistic performances and integration possibilities similar to those of structural materials.

Mars® 600 is an innovative product from the Center Materials Research of Le Creusot and the result of Industeel rich expertise for over a quarter century on modern 600 HB materials.

Mars® 600 is a multipurpose 600HB with an impressive ballistic behavior in terms of deformation capacity and resistance to multi-impacts together with a workability (mainly bending) close to a 500HB steel.

Mars® 600 is the material of the future that will change armour designs meeting both light weight and integration requirements of manufacturers.

Its great properties suggest unlimited possibilities.

Standards

	France NF A36- 800-1	Germany TL 2350	UK DEF STAN 95-24	USA MIL-DTL
Mars® 190	CLA	hardnesses G, H, K, L	CL 1&2	12560 CL 1&2&3
Mars® 220	THD 1	Quality O	CL 3A	12560 CL 4a
Mars® 240	THD 2	Quality Z	CL 3	46100
Mars® 300	THD 4 & THD 5	Quality T	CL 5	32332 CL 1 & CL 2
Mars® 300 perfo- rated	THD 4 & THD 5	Quality T	CL 5	32332 CL 2
Mars® 600	THD 4	Quality T	CL 5	32332 CL 1

Heat chemical composition (weight %)*

Grade	Thickness (mm-inch)	C	S	P
Mars® 190		0,30	0,005	0,012
Mars® 220	4 to 50 0.16 to 2	0,22	0,005	0,015
Mars® 220**	>20 to 80 0.78 to 3.15	0,24	0,005	0,015
Mars® 240		0,30	0,002	0,010
Mars® 300 and perforated	3 to 25 0.12 to 0.95	0,55	0,002	0,010
Mars® 300	> 25 > 0.95	0,55	0,002	0,010
Mars® 600		0,50	0,002	0,010

*Maximum values

** Special version for heavy vehicles underbellies

Si	Mn	Ni	Cr	Mo	V
0,4	1,2	1,8	1,5	0,6	0,1
0,5	1,5	2	1	0,6	-
0,5	1,5	5	2	0,6	-
0,4	1	1,8	1,6	0,6	-
1	0,7	2,4	0,4	0,5	-
1	0,7	4,5	0,4	0,5	-
1	1	2,4	0,5	0,5	-

Mechanical properties

Grade	Thickness mm- (inch)	Delivery condition	Usual range of hardness (HB)
Mars® 190	$t \leq 12$ ($t \leq 0.47''$)	Guarantees	352 - 388
Mars® 190	$12 < t \leq 35$ ($0.47'' < t \leq 1.38''$)	Guarantees	331 - 375
Mars® 190	$35 < t \leq 60$ ($1.38'' < t \leq 2.36''$)	Guarantees	302 - 341
Mars® 190	$60 < t \leq 85$ ($2.36'' < t \leq 3.30''$)	Guarantees	262 - 331
Mars® 190	$85 < t \leq 120$ ($3.30'' < t \leq 4.72''$)	Guarantees	248 - 285
Mars® 190	$120 < t \leq 150$ ($4.72'' < t \leq 6''$)	Guarantees	241 - 277
Mars® 220	$4 < t \leq 50$ ($0.16'' < t \leq 2''$)	Guarantees	420 - 470
Mars® 220		Typical values	440
Mars® 220	$50 < t \leq 80$ ($2'' < t \leq 3.15''$)	Guarantees	≥ 400
Mars® 240		Guarantees	477 - 534
Mars® 240		Typical values	495
Mars® 300		Guarantees	578 - 655
Mars® 300		Typical values	630
Mars® 300 perforated		Typical values	630
Mars® 600		Guarantees	578 - 655
Mars® 600		Typical values	601

* Standard specimen size 10 mm (0.39") x 10 mm (0.39")

YS Rp 0.2 MPa (ksi)	UTS Rm MPa (ksi)	Elongation 5d (%)	KV Transverse Direction -40° J (ft.lbs)*
			≥ 20 (≥ 15)
			≥ 24 (≥ 18)
			≥ 32 (≥ 24)
			≥ 36 (≥ 26)
			≥ 56 (≥ 41)
			≥ 64 (≥ 47)
≥ 1100 (160)	≥ 1250 (181)	≥ 10	≥ 27 (≥ 20)
1150 (167)	1450 (210)	13	48 (35)
≥ 800 (116)	≥ 1300 (189)	≥ 10	≥ 20 (≥ 15)
≥ 1100 (160)	≥ 1600 (232)	≥ 9	≥ 16 (≥ 12)
1300 (189)	1700 (247)	12	28 (21)
≥ 1300 (189)	≥ 2000 (290)	≥ 6	≥ 8 (≥ 6)
1600 (232)	2300 (335)	7	9 (7)
-	-		-
≥ 1300 (189)	≥ 2000 (290)	≥ 7	≥ 16 (≥ 12)
1450 (210)	2150 (312)	10	23 (17)

The classical operations using mechanical process (drilling, milling, sawing) may be done on protection steels, but due to their increased hardness, require the use of special tools, for example, carbide tools. It is possible to perform drilling using thermal operations, please see the “Thermal Operations” chapter.

General recommendations for machining Mars® steels



1 – It is very important to strongly fasten the steel part to the support in order to avoid vibrations that will cause splintering and tool breakage.

2 – For these same reasons, the machine tools used must be as rigid as possible.

3 – Drilling is done with the shortest drill possible.

4 – The drill deterioration (beyond normal use) is accelerated by punchings at the end of drilling (flaking). To remedy this, guide bushings may be used; drilling in “bundles” is strongly discouraged.

5 – Generally speaking, we advise using carbide tools (tungsten, for example). It is possible to use high-speed steels, but only for Mars® 190.

6 – “Soluble oil” type lubricants are advised for operations. Lime-sulphur additives may be used to enable better lubrication. The lubrication pressure must be at least 10 bar in order to be effective.

7 – Cutting parameters (speed, feed, depth of cut for milling) must be reduced by at least half compared to that used for a classical steel of average hardness (type XC38 - SAE- J403-1038).

8 – Particular attention should be paid to the problems of condensation on plates (when the plates temperature is less than the ambient temperature),

9 – For other questions on this matter, contact us at:
contact.industeel@arcelormittal.com

A. Drilling

Examples of parameters for drilling with a diameter of 10 mm (0.39") (depth: maximum 5 times the drill diameter).

Monobloc carbide bit, Seco Feedmax SD1103:

Grade	Cutting speed Vc m/min (ft/min)	Feed f mm/tr (inch/rev)
42CrMo4 * (Rm = 700 N/mm ²)	75 (246)	0.24 (0.01)
Mars® 190	45 (148)	0.17 (0.0067)
Mars® 220	45 (148)	0.16 (0.0063)
Mars® 240	45 (148)	0.16 (0.0063)
Mars® 300	33 (108)	0.10 (0.0039)
Mars® 600	35 (115)	0.09 (0.0035)

Interchangeable bit crown, Seco Crownloc SD103:

Grade	Cutting speed Vc m/min (ft/min)	Feed f mm/tr (inch/rev)
42CrMo4 * (Rm = 700 N/mm ²)	85 (219)	0.19 (0.0075)
Mars® 190	45 (148)	0.14 (0.0055)
Mars® 220	45 (148)	0.13 (0.0051)
Mars® 240	45 (148)	0.13 (0.0051)
Mars® 300	25 (82)	0.085 (0.0033)
Mars® 600	30 (98)	0.088 (0.0035)

*As reference

It is possible to use an indexable insert tool, but its use will be advised for diameters greater than 15 mm (0.59"), of the higher hardness grades of the Mars® range.

B. Milling

Example of milling conditions (during finishing) with a Walter brand mill, ref. F4033.B.050.Z06.06 Xtra.Tec. Chip ref. SNGX1205ANN-F57, grade WSP 45 Tiger.tec

	Mars®	XC38 hardened (SAE 1038)
Cutting speed (rev/min)	200	500
Feed per round mm/min (<i>inch/min</i>)	180 (7.08")	310 (12.20")
Depth of cut mm (inch)	0.1 (0.0039")	0.2 (0.0078")

C. Sawing

In the same manner as for milling, a carbide coated blade will be the best solution. It is crucial to reduce the cutting speed by at least 50% compared to that used for a classical steel of the XC38 hardened type - SAE- J403-1038.

D. Water jet cutting

This method is ideal for producing small parts from plates, but can also be used for parts with larger dimensions.

The main interest in water jet lies in **the absence of a Heat Affected Zone (HAZ)** and thus by the absence of a modification in structure. This process enables processing products with greater thicknesses than thermal cutting methods, with better tolerances, but generally lower productivity.

Various methods of cutting and machining using thermal processes are quite interesting for Mars® steels. In fact, the very high hardness of Mars® steels (specifically Mars® 300 and 600) does not affect the cutting speed. However, laser processes, oxygen cutting and plasma cutting create a heat affected zone (HAZ) that must be taken into account for the future steps of product processing and for its use.

During cold periods or in workshops that are inadequately heated, **it is advised to pre-heat** the plates whose temperature is less than **15°C–60°F**.

Particular attention should be paid to the problems of condensation on plate (when the plate temperature is less than the ambient temperature).

Significant condensation may lead to the introduction of hydrogen in the plate during cutting. In fact, trapped hydrogen can be harmful for the steel's structure.

Monitor the inward angles, the windows or shapes cut inside parts and in general, all areas that may be prone to stress concentrations.

A. Laser procedure

This process is very interesting for Mars® steels, in particular for Mars® 300, 300 perforated, and 600 steels that offer increased hardnesses.

1. Laser cutting

Laser cutting has the following benefits:

- Dimensional precision and regularity of cut.
- The heat affected zone is not as large as that resulting from a plasma cut (total zone ≤ 1 mm (0.039") for thicknesses of ≤ 15 mm (0.59")),
- Little deformation due to the cut because of the very limited heating of the metal in the area where the cut is made,
- Few or no burrs requiring immediate post-cut trimming,
- Reduced draft area compared to plasma or oxycutting techniques that leaves dross of 1.5mm (0.059") to 7mm (0.28") on the surface

These benefits make laser cutting the best current method for thermal cutting Mars® steels for thin thicknesses.

To make the most of the process, it is necessary to:

- Eliminate all foreign bodies present on the surfaces to be cut (water, grease, oil, paint, chloride products, etc.). Shot blasted plates are perfectly suitable,
- Adjust the cutting parameters (power, speed, beam diameter, protection gas, focusing distance, etc.) based on the thicknesses and the quality criteria imposed (roughness), as well as the productivity and type of laser.

2. Laser beveling


Beveling is similar to a cutting operation. The thickness to be taken into account for cutting the thickness of the plate should be multiplied by :

$$\frac{1}{\cos \alpha}$$

where α is the targeted bevel angle:

Thickness to be cut =

$$A = \frac{Th}{\cos \alpha}$$

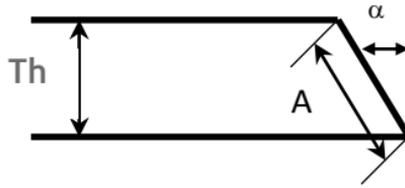

The maximum thickness is thus based on the thickness of the plate and the bevel.

Some cut thickness values based on the plate thickness:


Thickness t mm (inch)	Angle of targeted bevel (°)							
	15 mm - inch		30 mm - inch		45 mm - inch		60 mm - inch	
3 (0.12")	3.1	0.122	3.5	0.136	4.2	0.167	6.0	0.236
5 (0.2")	5.2	0.204	5.8	0.227	7.1	0.278	10.0	0.394
7 (0.28")	7.2	0.285	8.1	0.318	9.9	0.390	14.0	0.551
8 (0.315")	8.3	0.326	9.2	0.364	11.3	0.445	16.0	0.630
10 (0.39")	10.4	0.408	11.5	0.455	14.1	0.557	20.0	0.787
13 (0.52")	13.5	0.530	15.0	0.591	18.4	0.724	26.0	1.024
15 (0.59")	15.5	0.611	17.3	0.682	21.2	0.835	30.0	1.181

3. Laser drilling

The laser may be used advantageously for drilling Mars® grade plates.

As an example, and for sufficient diameters in relation to the thickness, proceed as follows:

- Pierce to the centre of the circle to be drilled, then move towards the periphery and cut the hole:

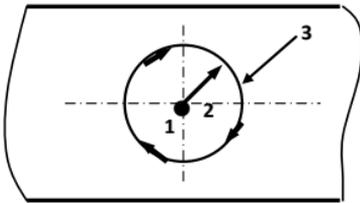

- Phase 1: drilling,
- Phase 2: cutting a radius,
- Phase 3: cutting a hole.

This technique should be refined when the hole's diameter is less than the plate thickness.

Procedure limitation:

- The maximum drillable thickness: approximately 15 mm (0.59"), according to the capacities of the equipment used.
- The laser's post-drilling reaming is not industrially feasible; the thermally affected zones created by the laser drilling lead to hardnesses that are too great.

B. Oxygen cutting

The usual precautions for cutting speed, gas flow, nozzle sizes, etc. must be adhered to.

Speed values usable for oxygen cutting of Mars® steels: (Of course these values vary based upon the material used)

Thickness mm (inch)	Movement speed m/min (ft/min)	Gas consumption L/hour (gallon/hour)		Bleed width mm (inch)
		Oxygen	Acetylene	
4 (0.16")	0.6 to 1 (2-3.3)	800 to 1200 (210 - 315)		2 (0.08")
5 (0.2")	0.6 to 0.9 (2-3)	800 to 1200 (210 - 315)		2 (0.08")
8 (0.315")	0.5 to 0.7 (1.6-2.3)	1000 to 1400 (265 - 310)	200 to 300 (55 - 80)	2 (0.08")
10 (0.39")	0.4 to 0.65 (1.3-2.1)	1000 to 1600 (265 - 425)		2.5 (0.1")
12 (0.47")	0.4 to 0.6 (1.3-2)	1200 to 1800 (315 - 475)		2.5 (0.1")

C. Plasma torch cutting

Plasma torch cutting is strongly discouraged under water.

Dry plasma torch cutting is appropriate if cutting gas contains minimal hydrogen. Plasma cutting is used for the most common thickness range. Its benefits in terms of speed, fewer deformations, smaller HAZ, makes it preferable to classical oxygen cutting.

Precautions for oxygen and plasma cutting :



- Follow the preheating temperature; see table below
- Minimize heat affected zone (by configuring the cut parameters) in order to avoid soft spots that are too large and that may cause the rejection of certain parts.
- Avoid repeat cutting,
- Finish the post-cutting operations without delay,
- Inspect, at least visually, but preferably using dye penetrant, the absence of cracks on the plasma cut edges.

Preheating table

	Plate thickness mm (inch)				
	12 (0.47")	15 (0.59")	20 (0.78")	50 (2")	75 (3")
Mars® 190	No preheating				150°C****
Mars® 220	No preheating			100 °C*** - 200 °C**	
Mars® 240	No preheating		150 °C****		
Mars® 300	100 °C*** - 130 °C*				
Mars® 600					

*260°F - **392°F - ***212°F - ****302°F

A. Cold forming - Bending

Safety

Taking into account the yield strength of Mars® steels, the roll forming and bending operations must be carried out with caution.

It is essential to provide for a safety distance and the appropriate individual and collective safety equipment.

Furthermore, these operations require powerful machines equipped with tooling (rollers, mandrels, dies, etc.) with mechanical characteristics that are capable of enduring the hardness level of the metal plates.




Example of part obtained after cold bending.
MARS 240 th. steel 4.75 mm (0.18")

1. Recommendations and precautions for cold forming Mars® steels

- Direction of the bending axis:

As much as possible, the bending will be directed perpendicularly to the plate rolling direction :

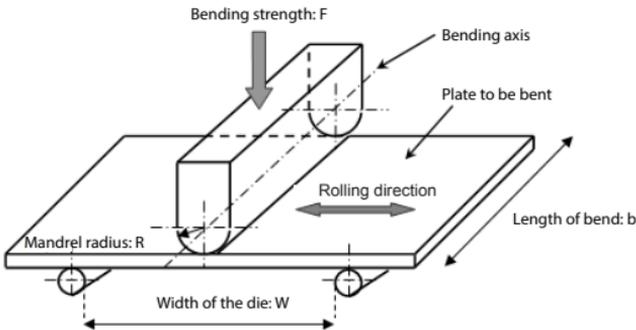

- Condition of the edges:

The edges must be free from cracking initiation defect (blow-cuts or burrs from oxygen cutting) and will also be ground in order to remove the rough edges. Ideally, the edges of the plate lower surface should be rounded by grinding at the point where the die will exert pressure.

- Condition of the plate surface:

The metal plates must not have marks in the bending zone (steel stamping marks, for example) or other surface defects capable of producing a crack starter during operation.

- Temperature:

For a plate temperature less than 15 °C (60°F), preheating will precede the processing of the plates.

- Tooling condition:

Keep the tooling clean by eliminating the scale deposited at each operation. Proper lubrication of the mandrel and the die helps a good sliding of the metal between them and thus good stress distribution. For the same reasons, it is advised to round out the female die's edges. The bending force and the springback can thus also be slightly reduced.

- Bending speed:

In extreme cases, a slow bending speed enables carrying out the operation with greater safety.

- Bending parameters:

The mandrel bending radius is the most influential parameter over the risk of cracking.

It must be as large as possible and must not be less than the values indicated in the table below.

Minimum bending conditions:

Grade	Thickness t mm (inch)	Mandrel R		Width of the die (W)
		//	⊥	
Mars® 190		5t		R x 2 + 3t
Mars® 220	< 8 (0.315")	5t	4t	
	8 to 16(0.315 to 0.63")	6t	5t	
	> 16 (0.63")	Contact us		
Mars® 240	< 8 (0.315")	8t	5t	
	8 to 16 (0.315 to 0.63")	9t	7t	
	> 16 (0.63")	Contact us		
Mars® 300		Contact us		
Mars® 600	< 4 (0.16")	10t	8t	
	4 to 6 (0.16 to 0.24")	12t	10t	
	6 to 9 (0.24 to 0.35")	14t	12t	
	> 9 : contact us			

t is the thickness of the plate.

R is the minimum radius of the mandrel.

// or \perp \Rightarrow Bending line parallel or perpendicular in the rolling direction.

Industeel may deliver formed parts upon request.

****For multi-steps bending, contact us at
contact.industeel@arcelormittal.com**

2. Bending force

The bending force depends on four main parameters:

- The thickness
- The yield strength
- The length of the bend
- The width of the female die

It can be estimated based on the following formula:

$$F = \frac{b \cdot t^2 \cdot R_m}{W - R - ep}$$


Where:

- F is the bending force (in N)
- b is the length of the bend (in mm)
- R_m (UTS) is the maximum resistance of the material (MPa)
- W is the width of the die (in mm)
- t is the plate thickness (in mm)
- R is the mandrel radius (in mm)

Friction mitigation will also reduce the bending force.

3. Springback after bending

During the bending operation, under the action of the mandrel, the metal sheet is bent at an angle of Θ_0 .

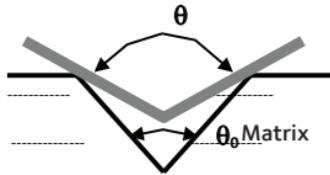

When the mandrel raises, the bend opens to an angle Θ .

The phenomenon, due to the relaxation of elastic stress, is called springback.

At the time of the tooling design, it will therefore be necessary to take this phenomenon into account.

The springback increases when the elastic limit of the material increases.

The ratio between bend radius and plate thickness also influence the springback.

The springback is also very sensitive to the clearance between the sheet and the tooling, in other words, to the gap between the die, the plate, and the mandrel.

Friction between the metal plate and the tools may aggravate this phenomenon.

Springback angles of several tens of degrees are possible for harder steels.

Preliminary trials are essential for accurately assessing this elastic springback.

B. Hot forming

Hot forming of Mars[®] grades is theoretically possible.

Nevertheless, the cooling speeds obtained after forming has to be consistent with the hardenability of the grade considered.

The hot forming temperatures are generally located between 900 °C (1650°F) and 950 °C (1740°F) based on the grade considered. After die quenching, a proper tempering treatment followed by air cooling has to be done → in this case contact us at contact.industeel@arcelormittal.com in order to determine the conditions.

When hot forming is planned on a Mars[®] steel, it must be specified in the order so as to be able to potentially adjust the grade to the required thickness and the capacities for cooling tools.


A. General and basic welding precautions:

1. Assembly cleanliness

The condition of the plate cleanliness for the elements to be assembled may be an important factor in avoiding defects such as inclusions or cracks.

Therefore it is essential to:

- Grind the surfaces before welding. In fact, after a thermal cutting operation or even at the stage of delivery, a superficial layer of oxide exists. Mechanical grinding is the most effective method for eliminating these traces. Brushing, shot-blasting, and sand-blasting may also be suitable in the case of a slightly oxidised surface.

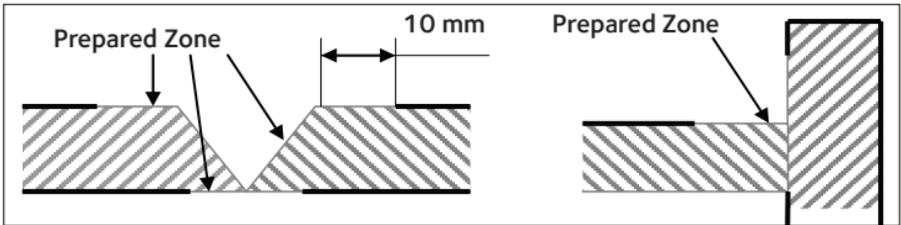

The following technique is recommended:

- Clean, de-grease, and dry surfaces using a solvent and a clean cloth before welding.
- Visually inspect the appearance of the edges to be welded and if possible, use dye penetration inspection. A thermal cutting defect may cause the crack initiation during welding.

2. Fitting

- It is preferable to position and hold the plates using mechanical means (bridges, clamps, bolts, Chicago bridges, etc.).
- Avoid beveling angles that are too sharp.

- Avoid gaps that are too big to mitigate shrinkage stress.
- Position the welds at a distance from the bend of at least equal to five times the plates thickness.

3. Plate temperature

Other than specific recommendation (p44, B. Consumables) about the welding conditions, Mars® steel may be welded without preheating if austenitic consumables are used.

However, in order to eliminate the risk of cracking, it is imperative that the temperature of the plates is at least 15 °C (60 °F) before any operation.

Particular attention should be paid to the problems of condensation on plate (when the plate temperature is less than the ambient temperature).

4. Tack welding

Tack welding must be done by a qualified welder (NF A80 200-1) and with as much consideration as for a normal welding operation.

- The advised length of a tack weld is at least 50 mm (2").
- The welding parameters used for tack welding must be reduced so as to limit dilution which decreases the risk of cracking in melted metal.
- Any cracked point must be ground and done again.
- The process of tack welding influences the appearance of the weld bead. MIG/MAG tack welding is preferable using a coated EE electrode (greater risks of bonding).

5 Making seams

The welding must be done by a qualified welder (NF A 80 200-1).

1. Priming

In the case of a shaft weld, it is recommended to use the run out tabs at the start and end of the seam. They enable the absorption of priming defects in the arc and craters at the end. These are then eliminated by grinding.

2. Length of the arc


When the length of the arc is too long, it may cause deterioration of the gas protection or by slag that may result in the introduction of ambient hydrogen and increase the risk of cold cracking.

3. Additional passes

When a weld is resumed, it is necessary to grind the end of the previous pass before remelting.


4. Bead shape and types of assembly

Defects in bead shape may cause cracks during use. To avoid these, some rules should be followed:

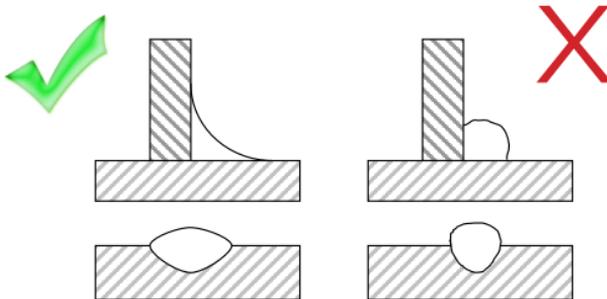

Particular case: At the ends of seams, crater cracks may occur. Thus it may be necessary to modify the parameters for arc fading in order to feed the crater at the end of the seam (here a convex form is preferred).

Also, during the conception of the design, when possible, the double seams will be preferred to the single seams:

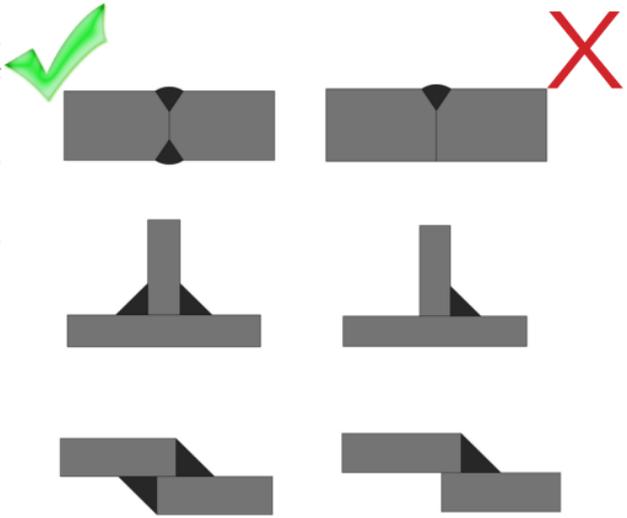


6 Welding sequences

The optimisation of welding sequences helps reducing residual stress and thus the risk of cracking and deformation.

The creation of residual stress is due essentially to the phenomenon of shrinkage of the heated parts. Indeed, a welding operation will cause localised heating, generating differences in dilatation and metallurgical transformations.

By allowing the possibility of deformation at assembly (thus by decreasing the level of clamping), we decrease the residual stress.


Example sequence:

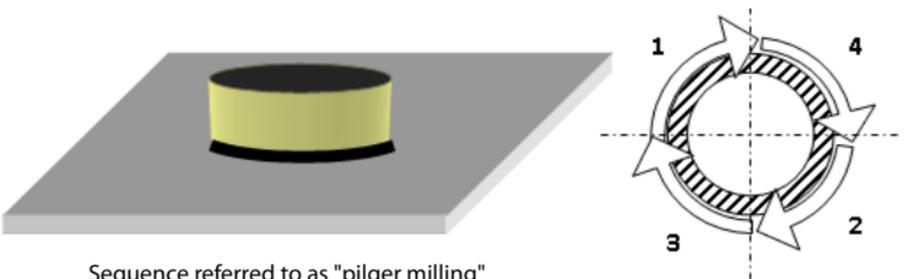

Sequence referred to as "pilger milling"


7. Assembly fatigue

Some simple rules in design or finishing allow improvement of the resistance to fatigue of welded assemblies.

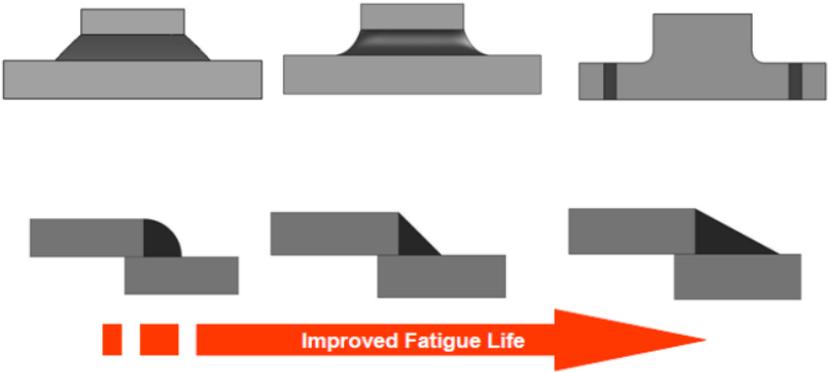

Recommended

To be avoided

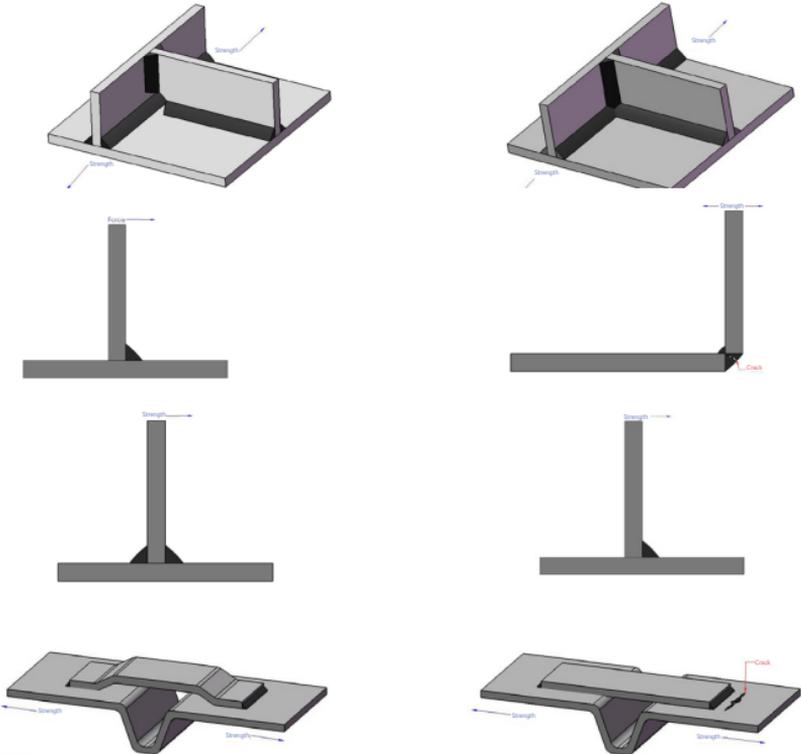

8. Handling of plate and parts before welding

The Mars® steels must not be handled with magnets or electromagnets. This equipment generates significant remanent magnetisation that may cause arc blowing.

9. Finishing

- Trimming seams by grinding allows improvement in the resistance to fatigue and removing the effects of notching.
- Hammering after welding has to be well managed to avoid development of micro-cracks.
- Welds cleaning may be done using a shot peening, brushing, shot-blasting or sand-blasting.
- Hot flame straightening or straightening by hammering has to be avoided.

B. Consumables

1. General information on consumables

The welding process for protection steels requires the use of :

- austenitic or austenitic-ferritic consumable products
- or ferritic consumable products.

The products proposed in this guide serve as examples and are suitable for working with Mars® protection steels.

However, based on the configuration of assembly and the dilution rate, the sensitivity to hot cracking may increase.

Other austenitic or austenitic-ferritic consumables, for example, those enriched in manganese and molybdenum, may also be more appropriate. For more information, contact us at: contact.industeel@arcelormittal.com

For high thicknesses or high stresses level, preheating is recommended: - 100°C (212°F) for austenitic

- 125°C (257°F) or 150°C (302°F) for ferritic

Preheat temperature and consumables

Grades	Thick (mm)	Temp. max (°C)	Plate thickness (mm)												
			3	15	25	40	75	80	150						
			<i>Low stresses</i>				<i>High stresses</i>								
Mars® 190	4-150 150-500	150	F 125												
				A 15				A 100							
Mars® 220	3-80	180	F 125	F 150											
				A 15				A 100							
Mars® 240	2.5-150	150		A 15				A 100							
Mars® 300	3-15	150	A 15	A 100											
Mars® 600	3-75	150				A 100									

- Non applicable
- Ferritic F (ER70), 125°C
- Ferritic F (ER70), 150°C
- Austenitic A (307), 15°C, <150°C
- Austenitic A (307), 100°C, <150°C

2. Coated electrode welding



Assembly with a coated electrode performed at the Centre de Recherche Industeel, Mars® grade 240

- Electrodes must have basic coating
- Electrodes must be preliminarily heated in a heat chamber and stored at high temperature
 - + Baking 350°C (662°F) for 2 hours
 - + Storage 150°C (302°F)
- Some electrodes are vacuum-packed and do not require baking. They must however be used within 8 hours after package opening. Please follow consumable supplier recommendations.

Among the various electrodes that can be used, we list:

	SMAW Austenitic	SMAW Ferritic
	EN ISO 3581-A : E 18 8 Mn or E 20 10 3 AWS A5.4 : E307-15 or 16 or E308Mo-17	EN ISO 2560-A : E4x 5 Bxx H5 AWS A5.18 E70xx H4
ESAB	OK 67.45 or OK 67.43	OK 55.00, FILARC 56S
LINCOLN	Jungo 307	Basic 7018
OERLIKON	SUPRANOX RS 307, SAFDRY B BLINDAGE	SUPERCITO
SELECTRAC	307B, 307R, INOX 308Mo	B56S
vaBW	BOHLER FOX A 7-4, THERMANIT X, THERMANIT XW Or BOHLER FOX CN 19/9 M THERMANIT 20/10 W	FOX EV 50, PHOENIX 120 K

3. Semi-automatic gas-shielded welding

- In the case of MIG (Metal Inert Gas) welding, only use wire.
- You can perform MIG (Metal Inert Gas) welds with greater bevel gaps. Sweeping the torch is therefore necessary and limits the energies introduced.
- The use of high silicon (0.7%) wire promotes wettability and provides good handling during welding.

Among the various wires that can be used, we list:

	SMAW Austenitic with M12 gas	SMAW Ferritic with M21 gas
	EN ISO 14343-A EN ISO 17633-A T-G 18 8 Mn or G 20 10 3 AWS A5.9 ER307 or ER308Mo	EN ISO 2560-A : E4x 5 Bxx H5 AWS A5.18 E70xx H4
CASTOLIN	EGAP 5216	-
ESAB	OK Autrod 16.95 OK Tubrod 15.34	OK Autrod 12.51
LINCOLN	LNM 307	SUPRAMIG
OERLIKON	FILINOX 307	CARBOFIL
SELECTRAC	18/8 Mn	F57
vaBW	THERMANIT X AVESTA 307-Si Or BOHLER CN 19/9 M-IG THERMANIT 20/10	UNION K 52, BOHLER SG 2

Note: The properties of the austenitic structure wires are different from those of Mars® steels. The builders of armoured vehicles must take these differences into account and provide for lap joints rather than butt welded joints.



T (MIG) Assembly: test performed at the Centre de Recherche Industeel, Mars® grade 600, thickness 8.4 mm (0.33")

C. Assembly with high density energy process

1. Electron-beam welding (EB)

EB welding of Mars® grade steels with low thickness is industrially used:

- The quality of the welds obtained (good soundness, no cracks) is completely satisfactory.
- The yield strength of the weld is comparable to that of the base material (weld without filler metal), on the other hand, its toughness is lower than that of a joint made with austenitic or austenitic-ferritic filler metal (cases of MIG welds and coated electrodes).

In fact, EB welding is still little used for carrying out large mechanical welded assemblies (e.g. armoured vehicle hulls).

There is a major reason for this: this process requires a substantial investment due in large part to the necessity of welding in a vacuum (→ large capacity vacuum chamber, pumping unit, etc).

2. Laser welding



Part obtained by laser welding.
Mars® 240 steel

Laser welding of Mars® grade steels with low thickness where $t. < 10 / 12 \text{ mm}$ (0.39"/0.47") is possible.

The characteristics of welded joints are similar to those of joints done by electron beam.

The main advantage of the laser beam compared to the electron beam is that there is no need for a vacuum in order to perform it. Welding is done under a gas shielding (like MIG) and without filler metal, the risks of introducing hydrogen during welding are limited, therefore the risk of cracking is also limited.

It is possible to use the hybrid laser / MAG welding process with gas: nitrogen, argon, helium.

For any other information, contact us at:
contact.industeel@arcelormittal.com

Notes :

Notes :

Notes :

Notes :

Notes :

Notes :

